

CAP-TYPE OIL FILTER WRENCHES

Precision-stamped, deep-reach cap wrenches are engineered for a perfect fit to remove Aftermarket and OEM spin-on filters and filter housings. All wrenches are heat-treated, black-oxide with a 3/8" square drive.

| No. | Diameter | No. Flutes | Applications |
|-------------|-----------|------------|------------------------------------|
| A250 | 74mm/76mm | 15 | Fram, Motorcraft |
| A251 | 76mm | 14 | AC, Purolator, STP, Mazda |
| A252 | 93mm | 15 | AC, Fram, Purolator, Nissan |
| A253 | 93mm | 36 | Motorcraft |
| A254 | 73mm | 14 | Toyota, Lexus |
| A255 | 65mm/67mm | 14 | AC, Fram, Honda, Purolator, Toyota |
| A256 | 68mm | 14 | Mitsubishi, Subaru |
| A257 | 80mm | 15 | Honda, Nissan, Purolator |
| A258 | 74mm | 15 | AC, Motorcraft |
| A259 | 90mm | 15 | Honda, Mitsubishi |
| A260 | 82mm | 15 | Wix |
| A261 | 86mm | 16 | Volvo |
| A262 | 100mm | 15 | Isuzu, Mitsubishi, Wix |
| A263 | 76mm | 8 | Mopar, Fiat, Lancia |
| A264 | 76mm | 15 | Motorcraft |
| A265 | 64mm | 14 | Lexus, Toyota |
| A266 | 88mm | 15 | Hyundai |




096950 11 PC. MECHANIC'S CAP-TYPE OIL FILTER WRENCH ASSORTMENT

Eleven popular Cap Wrenches and application chart in blow mold case.

Includes:

| | |
|------|------|
| A250 | A256 |
| A251 | A257 |
| A252 | A258 |
| A253 | A261 |
| A254 | A262 |
| A255 | |

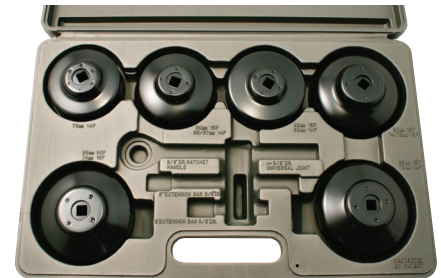

LOW-PROFILE METRIC CAP SOCKETS

Low profile metric hex sockets remove housings with cartridge-type oil & fuel filters. Features chrome vanadium steel and 3/8" square drive.

| No. | Size | Applications |
|-------------|------|-------------------------------------|
| 2570 | 27mm | Mercedes, Smart |
| 2571 | 29mm | Cummins |
| 2572 | 32mm | Saturn, GM, Mercedes |
| 2574 | 36mm | BMW, Ford, Mercedes, Mini, VW, Audi |



026400 10 PC. OEM OIL & FUEL FILTER SERVICE KIT

Contains all tools needed for removal of Oil & Fuel Filter Housings and some OEM spin-on filters found on domestic and import cars. Includes six Cap Wrenches: A251, A261, A263, A264, A265, A266 and four Cap Sockets: 2570, 2571, 2572 and 2574. All packed in blow mold case.



OIL FILTER WRENCHES



025100 33 PC. PROFESSIONAL LUBE SERVICE KIT

The most critical tools needed for complete lube service for both import and domestic models. All tools designed and manufactured for the professional and are packed in blow mold case. Includes:

13 Cap Wrenches - #A250 through A262

2 Cap Sockets - #2572, 2574

2 Narrow Band Swivel Wrenches - #2587, 2588

1 Band Wrench - #2595

1 Spider Wrench - #2506

1 Pliers Wrench - #2530

6 Lube Wrenches - #2581 through 2586


7 Drain Plug Wrenches - #2038, 2039, 2040, 2041, 2049 (2 pc), 9250



HEAVY-DUTY SWIVEL-TYPE OIL FILTER WRENCHES

Exclusive design features: Extra-thick yoke for added strength, link mechanism to expand the working range by over 10%, adjusting screw to tighten or loosen swivel and thick cushion grip for improved comfort.

| No. | Range | Application |
|------|-------------------------------|--------------------------------|
| 2538 | 2-1/4" - 2-7/8" (57mm-73mm) | Sub-compacts & Fuel Filters |
| 2540 | 2-9/16" - 3-1/4" (65mm-83mm) | Small Oil Filters |
| 2545 | 2-15/16" - 3-3/4" (75mm-95mm) | Standard Oil Filters |
| 2548 | 3-5/8" - 4-3/8" (92mm-111mm) | Large Oil Filters |
| 2551 | 4-3/4" - 5-3/4" (120mm-146mm) | Caterpillar/John Deere Filters |
| 2552 | 4" - 4-3/4" (100mm-120mm) | Cummins/Detroit Diesel Filters |

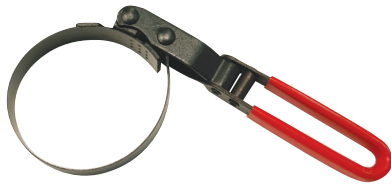

SWIVEL-TYPE OIL FILTER WRENCHES

Rugged construction and swivel design for the most common applications.

| No. | Range | Application |
|------|-----------------------------|----------------------|
| A290 | 2-3/4" - 3-1/2" (70mm-89mm) | Small Oil Filters |
| A295 | 3" - 3-1/4" (76mm-95mm) | Standard Oil Filters |



2535 HEAVY-DUTY SLOTTED/ SWIVEL-TYPE OIL FILTER WRENCH

Features 3-step slotted link and heavy duty handle design.
Range: 2-7/8" - 4-3/8" (73mm-111mm)



A296 SLOTTED/SWIVEL-TYPE OIL FILTER WRENCH

Features 3-step slotted link and thick cushion grip inside band.
Range: 2-3/4" - 4-1/2" (70mm-114mm)



NARROW-BAND SWIVEL-TYPE OIL FILTER WRENCHES

Narrow band allows access to hard-to-reach filters. Two sizes fit most automotive filters. Features swivel design with locking nut, heavy-duty yoke and link mechanism. Handle is vinyl-dipped.

| No. | Range | Application |
|------|------------------------------|-------------------|
| 2587 | 2-9/16" - 3-1/4" (65mm-83mm) | Small Oil Filters |
| 2588 | 2-7/8" - 3-3/4" (75mm-95mm) | Large Oil Filters |

HEAVY-DUTY BAND-TYPE OIL FILTER WRENCHES

Tempered steel band with gripping studs, heavy-duty steel handle with action grip link, and "brake" built into band to maintain shape.

| No. | Range | Application |
|-------------|------------------------------|----------------------|
| 2592 | 2-1/4" - 2-9/16" (57mm-65mm) | Fuel Filters |
| 2590 | 3-7/16" - 3-3/4" (87mm-95mm) | Standard Car Filters |



LONG HANDLE BAND-TYPE OIL FILTER WRENCHES

Wider band, longer handle and vinyl grip.

| No. | Range | Application |
|-------------|------------------------------|----------------------|
| A210 | 2-7/8" - 3-1/4" (73mm-83mm) | Small Car Filters |
| A215 | 3-7/16" - 3-3/4" (87mm-95mm) | Standard Car Filters |



BAND-TYPE OIL FILTER WRENCHES

Basic band design with vinyl grip handle and dimpled band features.

| No. | Range | Application |
|-------------|-----------------------------|----------------------|
| 2515 | 2-1/2" - 3-1/4" (64mm-83mm) | Small Car Filters |
| 2516 | 3-1/4" - 3-3/4" (83mm-95mm) | Standard Car Filters |



2509 HEAVY-DUTY SLOTTED-TYPE OIL FILTER WRENCH

Slotted link feature adjusts band for wider application range. Long handle is heavy-duty construction. Range: 2-3/4" - 4-1/4" (70mm-108mm)



A280 SLOTTED-TYPE OIL FILTER WRENCH

Slotted link feature adjusts band for wider application range. Handle is vinyl dipped. Range: 3" - 4" (76mm-102mm)



A225 CLINCHER-TYPE OIL FILTER WRENCH

Serrated band provides for excellent gripping power. Multi-link design conforms to all shapes with vinyl handle. Range: 3" - 3-3/4" (75mm-95mm)



HEAVY-DUTY SQUARE DRIVE OIL FILTER WRENCHES

Narrow band for tight clearances, with heavy-duty 3/8" square drive.

| No. | Range | Application |
|-------------|------------------------------|------------------|
| 2520 | 2-3/4" - 3-1/8" (71mm-79mm) | Compact Filters |
| 2525 | 3-7/16" - 3-3/4" (87mm-95mm) | Standard Filters |



SQUARE DRIVE OIL FILTER WRENCHES

Wide band with 3/8" square drive.

| No. | Range | Application |
|-------------|-----------------------------|------------------|
| A200 | 2-3/4" - 3-1/8" (71mm-75mm) | Compact Filters |
| A205 | 3-1/4" - 3-3/4" (82mm-95mm) | Standard Filters |



OIL FILTER WRENCHES



SQUARE DRIVE OIL FILTER WRENCHES - TRUCK

Extra heavy-duty band, yoke and 1/2" square drive for high torque requirements. Services trucks and tractors, including farm and fleet.

| No. | Range | Application |
|-------------|-------------------------------|------------------------|
| 2565 | 4-1/8" - 4-5/8" (104mm-118mm) | Cummins/Detroit Diesel |
| 2567 | 4-5/8" - 5-1/8" (118mm-131mm) | John Deere |
| 2569 | 5-1/8" - 5-5/8" (131mm-144mm) | Caterpillar |



PLIERS-TYPE OIL FILTER WRENCHES

Heavy-duty forged pliers remove the most stubborn filters with adjustable jaws and forged "teeth". Also great for grabbing other round object like pipes or parts.

| No. | Range | Application |
|-------------|------------------------------|----------------------|
| 2532 | 1-3/4" - 3-1/2" (45mm-89mm) | Compact Car Filters |
| 2534 | 2-1/8" - 4-1/4" (54mm-108mm) | Standard Car Filters |
| 2536 | 3-5/8" - 6" (92mm-152mm) | Truck Filters |



2537 OFFSET PLIERS-TYPE OIL FILTER WRENCH

Forged pliers wrench offers offset design to allow greater access in tight areas. Range: 2-1/2" - 4-5/8" (64mm-117mm)



2530 RATCHETING PLIERS-TYPE OIL FILTER WRENCH

Ratchet and lock mechanism self-adjusts to allow for multiple settings to service Oil Filters. Features heavy-duty forged handles with vinyl grip. Range: 2" - 5" (50mm-125mm)



A230 JAWS-TYPE OIL FILTER WRENCH

Open-ended band allows easier access to filter and serrated band grips the filter. Range: 2-3/4" - 4-1/4" (70mm-108mm)



2594 CHAIN-TYPE OIL FILTER WRENCH

Chain allows for diameter adjustment and better gripping. Features vinyl handle. Range: 2-3/4" - 4-1/2" (70mm-115mm)



2595 STRAP-TYPE OIL FILTER WRENCH

2" wide nylon band conforms to all shapes and tightens as you turn. Handle is 5-1/2" long with 1/2" square drive built into end. Working range up to 6" (152mm) diameter.



2596 HEAVY-DUTY STRAP-TYPE OIL FILTER WRENCH

Thick 2" wide nylon band is assembled to forged handle with 3/8" and 1/2" drive ends. Works up to 9" (229mm) diameter.

2505 HEAVY-DUTY SPIDER-TYPE OIL FILTER WRENCH

Three clamping legs are driven by gear mechanism for maximum range and superior gripping. Use with 3/8" drive tools.

Range: 2-3/8" - 4-3/4" (61mm-121mm)



2506 SPIDER-TYPE OIL FILTER WRENCH

Three short legs, for low-profile applications, are driven by gear mechanism. Use with 3/8" drive tools.

Range: 2-3/8" - 3-3/4" (61mm-95mm)



CAM-ACTION OIL FILTER WRENCHES

Two thick jaws slide together using a cam mechanism to grab filters. Use with 3/8" square drive tools or 7/8" hex socket.

| No. | Range | Application |
|------|-----------------------------|------------------|
| 2550 | 2-3/4" - 3" (70mm-76mm) | Compact Filters |
| 2555 | 3-3/8" - 3-7/8" (86mm-98mm) | Standard Filters |



OIL FILTER WRENCHES

2507 BI-DIRECTIONAL SPIDER-TYPE OIL FILTER WRENCH

Patented design allows for both removal and installation of Oil Filters and housings. 3/8" square drive has built-in gear that turns 3 legs in both directions. Will grab any object from 50mm to 95mm (2" to 3-3/4"). Legs are angled to "bite" into hard-to-reach or dented filters. Wrench is low-profile to work in tight areas.

