


Last Modified: 7-13-2007		1.6 A
Service Category: Engine/Hybrid System	Section: Emission Control	
Model Year: 2008	Model: ES350	Doc ID: RM00000100Q00EX
Title: 2GR-FE EMISSION CONTROL: HEATED OXYGEN SENSOR: REMOVAL (2008 ES350)		

REMOVAL


1. REMOVE ENGINE UNDER COVER LH
2. REMOVE ENGINE UNDER COVER RH
3. REMOVE EXHAUST PIPE NO. 1 SUPPORT BRACKET [INFO](#)
4. REMOVE FRONT EXHAUST PIPE ASSEMBLY [INFO](#)
5. REMOVE HEATED OXYGEN SENSOR (for Bank 1)

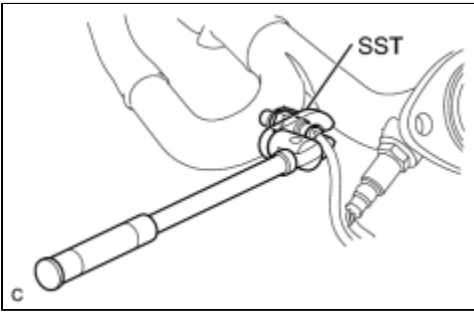

(a) Using SST, remove the oxygen sensor.

SST: 09224-00010

6. REMOVE HEATED OXYGEN SENSOR (for Bank 2)

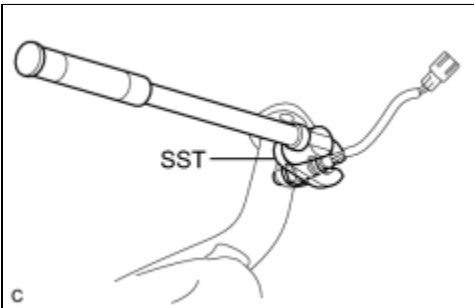

(a) Using SST, remove the oxygen sensor.

SST: 09224-00010

