

Last Modified: 7-13-2007		1.7 A
Service Category: Vehicle Interior	Section: Supplemental Restraint Systems	
Model Year: 2008	Model: ES350	Doc ID: RM000000V2T00FX
Title: SUPPLEMENTAL RESTRAINT SYSTEM: FRONT PASSENGER SIDE KNEE AIRBAG ASSEMBLY: INSTALLATION (2008 ES350)		

INSTALLATION

1. INSTALL FRONT PASSENGER SIDE KNEE AIRBAG ASSEMBLY

- (a) Check that the engine switch is off.
- (b) Check that the battery negative (-) cable is disconnected.


CAUTION:

Wait for 90 seconds after disconnecting the cable to prevent airbag deployment.

- (c) Connect the front passenger side knee airbag connector.

NOTICE:

When handling the airbag connector, take care not to damage the airbag wire harness.

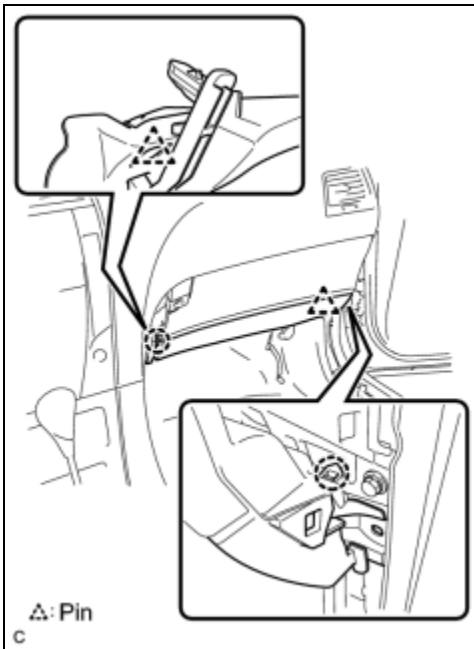

- (d) Engage the 2 claws and 2 pins.

HINT:

Make sure that the pins are securely installed in the front passenger side knee airbag assembly.

- (e) Install the front passenger side knee airbag assembly with the 3 bolts.

Torque: 10 N·m (102 kgf·cm, 7 ft·lbf)



2. INSTALL NO. 2 INSTRUMENT PANEL UNDER COVER SUB-ASSEMBLY



3. INSTALL INSTRUMENT PANEL FINISH PANEL END RH



4. INSTALL SIDE INSTRUMENT PANEL RH



5. INSTALL FRONT DOOR OPENING TRIM COVER RH



6. INSTALL FRONT DOOR SCUFF PLATE RH



7. CONNECT CABLE TO NEGATIVE BATTERY TERMINAL

8. PERFORM INITIALIZATION

(a) Perform initialization



HINT:

Some systems need initialization after reconnecting the cable to the negative battery terminal.

9. INSPECT FRONT PASSENGER SIDE KNEE AIRBAG ASSEMBLY



10. INSPECT SRS WARNING LIGHT

(a) Inspect the SRS warning light

