



LEXUS

GS300 (1998-2000), GS300 - w/o GPS (2001-2004)

GS400 (1998-2000), GS430 - w/o GPS (2001-2005)

PART NUMBER: LX-54-98

(See reverse side for LEXUS IS 300 (2001-2004) instructions)

PLEASE READ COMPLETE INSTRUCTIONS BEFORE INSTALLING THIS Pro.Fit VSM®.

All instructions assume a drivers seat vantage point. Caution is advised when removing and reassembling wood or plastic parts of a dash. Applying unnecessary force or pressure may cause a piece to crack or break.


Pro.Fit logo and part number will be right side up and readable when installed.

TOOLS REQUIRED: 10mm socket & driver, extension, hook tool, protective cloth.

PARTS INCLUDED: Pro.Fit VSM®, instructions.

LOCATION: To the right of the climate control.

STEP 1. Begin by applying the emergency brake. Turn the ignition to the **ON** position and shift the transmission into low gear. Insert your hook tool in behind the right top corner of the ashtray in between the ashtray and radio. Pull toward you to release one (1) clip. Perform this same action in the upper left corner of ashtray releasing one (1) more clip. Grasp the ashtray unit and pull toward you to release (2) bottom clips. **Do not disconnect the wiring to the ashtray.** Let the ashtray unit rest to the left of the console. Locate and remove two (2) 10mm hex head screws inside the ashtray cavity, using your 10mm socket, driver and extension. Set screws aside. Locate a **black plastic retainer** inside ashtray cavity. Grasp this retainer with your fingers and pull toward you to remove. Set retainer aside.

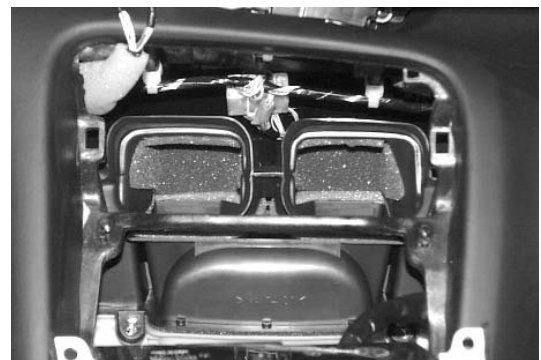

STEP 2. Locate the air duct module above the climate control. Insert your hook tool in between the dash pad and air vent in the upper right corner of the air vent. Pull toward you to release one (1) clip. Perform this same action in the upper left corner releasing one (1) more clip. Grasp the air duct and pull toward you to release two (2) bottom clips. Set the air duct on top of the dash. **Do not disconnect the wiring.** Locate two (2) 10mm hex head screws inside the air duct cavity. Remove these screws with your socket and driver. Set screws aside. Grasp the radio/climate control module. Pull the module out and let it rest on a protective cloth on the center console.



STEP 3. Locate the top right screw hole that holds the radio/climate control module in place. Place the **Pro.Fit VSM®** over this hole, aligning the slot in the **Pro.Fit VSM®** with the screw hole and small centering pin that is just below the screw hole. Place the radio/climate control back into place. Insert the top right screw that holds the radio/climate control in place and finger tighten halfway. Grasp the face of the mount and pull it as far forward as it will go. Then tighten the screw with the 10mm socket and driver. Replace the remaining three (3) screws and tighten.




Shown with optional GPS unit.

STEP 4. Reassemble the dash in reverse order securing all clips. Install your phone holder onto the **Pro.Fit VSM®**.

This completes the installation of your **Pro.Fit VSM®**.



Pro.Fit International, Inc.® may not be held liable for any damage to a vehicle before, during or after the installation or removal of this **Pro.Fit VSM®**. Pro.Fit may not be held liable for any personal injury resulting from accident or improper installation. Pro.Fit International, Inc.® 1335 Eagandale Court, Eagan, MN 55121, Ph: 651-688-3588 or 800-388-0073 Fx: 651-688-9876





IS 300 (2001-2005) (w/o GPS)

PART NUMBER: LX-54-98

(See reverse side for LEXUS GS300 (1998-2004), GS400 (1998-2000), GS430 (2001-2005) instructions)

PLEASE READ COMPLETE INSTRUCTIONS BEFORE INSTALLING THIS Pro.Fit VSM®.

All instructions assume a drivers seat vantage point. Caution is advised when removing and reassembling wood or plastic parts of a dash. Applying unnecessary force or pressure may cause a piece to crack or break.

Pro.Fit logo and part number will be right side up and readable when installed.


TOOLS REQUIRED: Hook tool, 10 mm socket and driver, #2 Phillips screwdriver, protective cloth, marking pen

PARTS INCLUDED: Pro.Fit VSM®, instructions.

LOCATION: Right of climate control.


STEP 1.

Begin by removing the small switch panel directly below the radio. Using a hook tool, gently pull outward to release the three (3) clips at the top of the panel. Next, release the two(2) clips on the right and left side of the panel. Let the panel hang down.

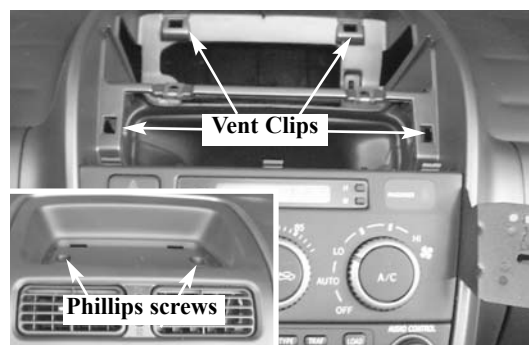

STEP 2.

There is a padded tray directly above the air vents. Using a hook tool, carefully lift up the front of the pad to release two (2) clips located in front of the Phillips screws. (See photo #1 inset picture). Lift the pad out and set aside. Using a #2 Phillips screwdriver, remove the two (2) Phillips screws located under the padded tray. Next, remove the air vent assembly. Using a hook tool, release the four (4) vent clips (photo #1) by pulling directly towards yourself. Slide the vent assembly out and set aside.

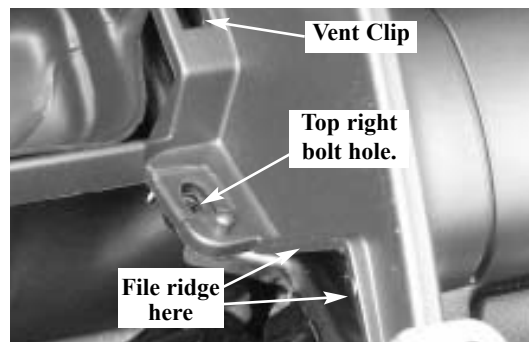

STEP 3.

Remove the four (4) gold-colored, 10mm bolts that hold the radio/climate control module in place. There are two (2) bolts on the top of the climate control and two (2) bolts on the bottom of the radio. Slide the radio/climate control module out slightly to reveal the top right bolt hole. Do not disconnect any wiring to the radio. Align the Pro.Fit VSM® over the bolt hole pictured in photo #2. There is a small plastic ridge under the VSM® that needs to be filed down in order for the VSM® to seat tightly against the dash. (See photo #2). Using a marking pen, mark the plastic ridge where the bottom of the VSM® touches it. Set the VSM® aside. Using a small file, carefully remove the ridge until smooth. Hold the the VSM® over the bolt hole while sliding the radio back into place. Reinsert the factory 10mm bolts through the radio mounting brackets and tighten. Reassemble the dash in reverse order.



This completes the installation of your Pro.Fit VSM®.

Pro.Fit International, Inc.® may not be held liable for any damage to a vehicle before, during or after the installation or removal of this Pro.Fit VSM®. Pro.Fit may not be held liable for any personal injury resulting from accident or improper installation. Pro.Fit International, Inc.® 1335 Eagandale Court, Eagan, MN 55121, Ph: 651-688-3588 or 800-388-0073 Fx: 651-688-9876

