
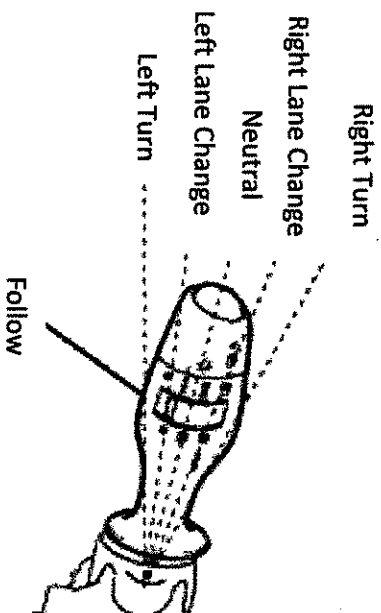


5. Operate Wiper Barrel Switch for preferred lane change mode setting:

- a. P1 for 3 flashes.
- b. P2 for 5 flashes.
- c. P3 for 7 flashes.
- d. P4 for lane change flasher OFF.

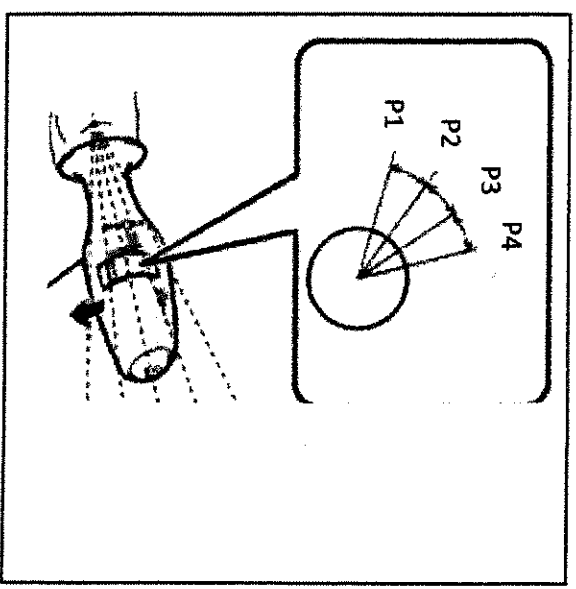

To set the lane change count:

- a. Headlight dimmer switch to NEUTRAL.
- b. Headlight dimmer switch to left lane change position.
- c. Headlight dimmer switch to NEUTRAL.

For no lane change flasher, but with same-direction cancel function enabled:

- a. Headlight dimmer switch to NEUTRAL.
- b. Headlight dimmer switch to right lane change position.
- c. Headlight dimmer switch to NEUTRAL.

6. Answer-back verification causes left turn signal light to illuminate a specific number of times:

- a. Illuminates 1 time = 3-flash control.
- b. Illuminates 2 times = 5-flash control.
- c. Illuminates 3 times = 7-flash control.
- d. Illuminates 4 times = No Flash and no same-direction cancel function.
- e. Illuminates 5 times = No Flash but with same-direction cancel function.

7. Customization is complete