## P310 HYBRID BATTERY CONTROL > HV BATTERY

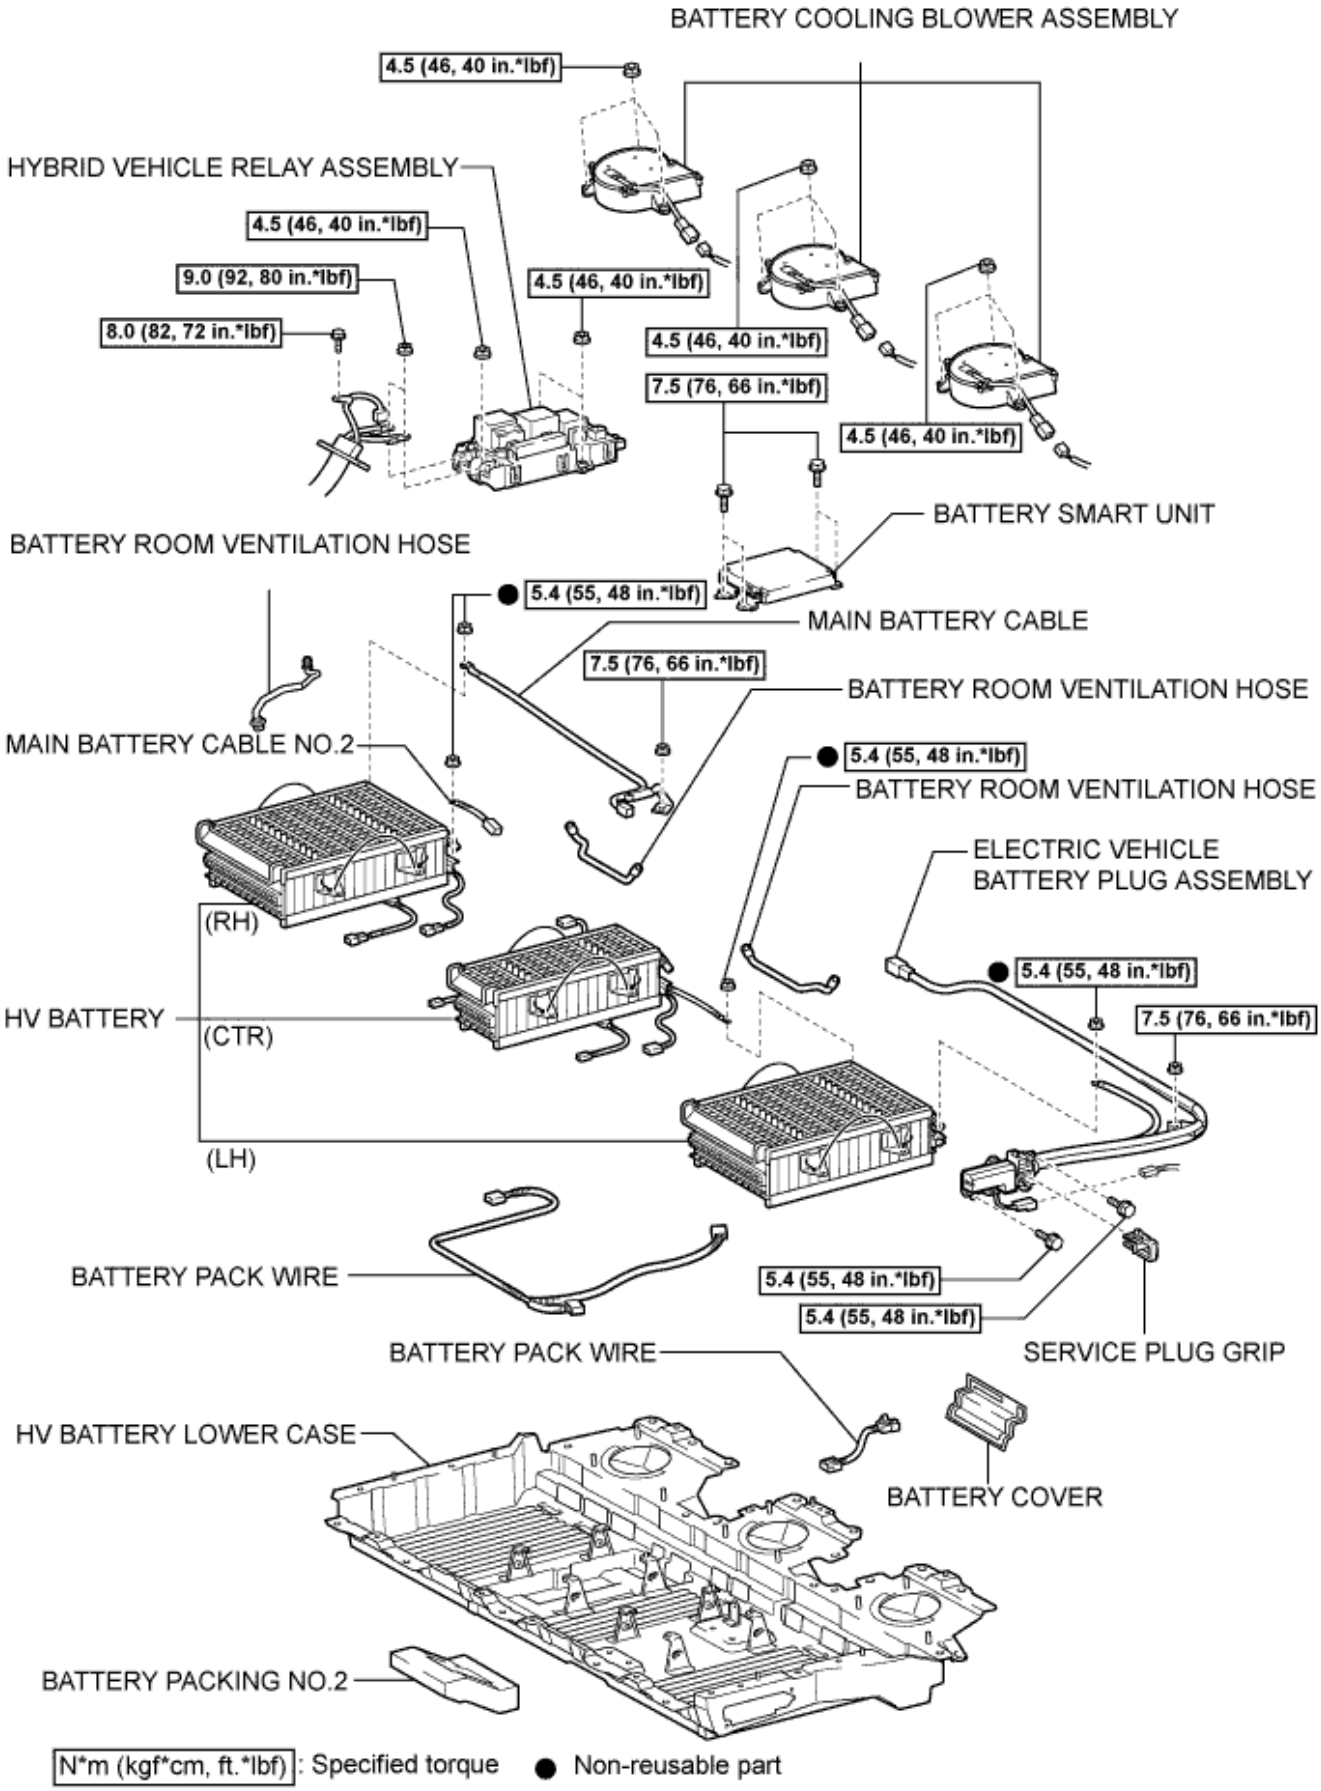
BATTERY COOLING BLOWER ASSEMBLY
4.5 (46, 40 in.*lbf)
HYBRID VEHICLE RELAY ASSEMBLY
4.5 (46, 40 in.*lbf)
9.0 (92, 80 in.*lbf)
4.5 (46, 40 in.*lbf)
8.0 (82, 72 in.*lbf)
4.5 (46, 40 in.*lbf)
7.5 (76, 66 in.*lbf)
4.5 (46, 40 in.*lbf)
BATTERY SMART UNIT
BATTERY ROOM VENTILATION HOSE
5.4 (55, 48 in.*lbf)
MAIN BATTERY CABLE
7.5 (76, 66 in.*lbf)
BATTERY ROOM VENTILATION HOSE
MAIN BATTERY CABLE NO.2
5.4 (55, 48 in.*lbf)
BATTERY ROOM VENTILATION HOSE
ELECTRIC VEHICLE
BATTERY PLUG ASSEMBLY
(RH)
5.4 (55, 48 in.*lbf)
HV BATTERY
(CTR)
7.5 (76, 66 in.*lbf)
(LH)
BATTERY PACK WIRE
5.4 (55, 48 in.*lbf)
5.4 (55, 48 in.*lbf)
BATTERY PACK WIRE
SERVICE PLUG GRIP
HV BATTERY LOWER CASE
BATTERY COVER
BATTERY PACKING NO.2
N*m (kgf*cm, ft.*lbf): Specified torque
Non-reusable part

A113843E02