AutoTap Express DIY

Home | Check Engine Light | Diagnostic Wizard | Emission Test | Vehicle Snapshot | Real Time Data

- Fuel Related Codes
- Hard Starting (Cold)
- Hard Starting (HOT)
- Hard Starting (Anytime)
- Hesitation/stumble When Accelerating
- Idle (Rough)
- Idle (Too fast)
- Idle (Too slow)
- Ignition Related Codes
- Knock Sensor Codes
- Lean Codes (Fuel Trim)
- MAF (airflow) Sensor Codes
- MAP Sensor Codes
- Misfire (No Codes)
- Misfire Codes (Cyl #)

MASS AIRFLOW SENSOR (MAF) CODES

An open or short in the MAF sensor will require replacing the sensor. Sometimes dirt or carbon can buildup on the MAF sensor wire making it slow to respond to changes in airflow. The sensor wire can be cleaned with electronics cleaner. Do not use any other type of cleaner.

Look at mass airflow rate at idle. Rev engine to 2500 rpm and hold, and note mass airflow rate again. No change would indicate a faulty MAF sensor. A sluggish response would indicate a dirty sensor. Clean and retest.

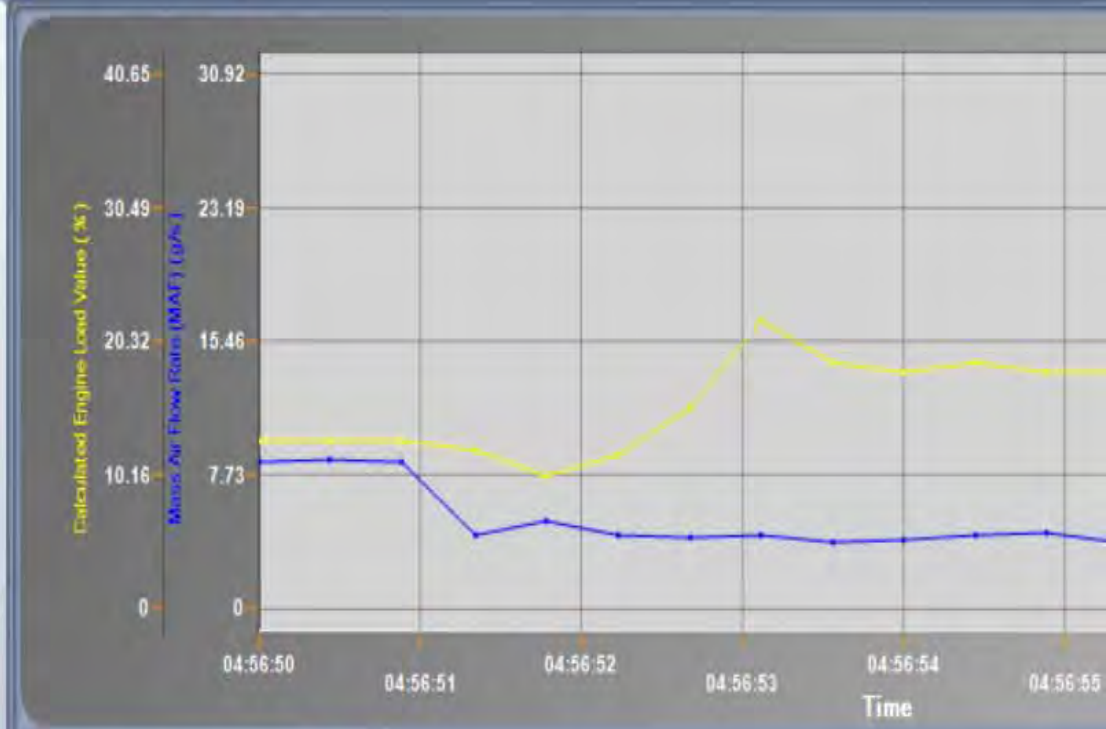

Select Parameters

PID Name	
Fuel System Monitor	Completed
Calculated Engine Load Value	17.2549 %
Mass Air Flow Rate (MAF)	3.95 g/s