'D052-0



Technical Service Information Bulletin September 21, 2007

Title: FLOOR MAT INSTALLATION DURING PDS Models:

'08 Lexus


Introduction 2008 model year Lexus vehicles are equipped with floor mat retaining clips to help ensure that the floor mats stay in the correct position. Attach the floor mat to the vehicle carpet using the floor mat retaining clips during Pre-Delivery Service (PDS).

CAUTION:

- ONLY use floor mats that can be retained using the retaining clips. All OEM Toyota floor mats are specifically designed to fit correctly and be retained using the retaining clips.
- Make sure the floor mat is properly placed on the vehicle carpet and secured with the retaining clips. If the floor mat is NOT properly placed and secured, it could slip and interfere with the movement of the pedals during driving and may cause an accident.
- Verify the operation of the accelerator, brake, and clutch (if equipped) pedals and clearance to the mat.
- **<u>NEVER</u>** install more than one floor mat at a time in the driver's seating position.
- If applicable, any secondary set of floor mats (based upon customer preference, such as the all weather floor mats or other floor mats) MUST be placed in the trunk with all the packaging material intact. Do NOT install the secondary mat on top of the primary floor mat already installed in the driver's seating position.

Applicable • 2008 model year Lexus vehicles. Vehicles

Installation Attach the floor mat to the vehicle carpet using the clips. Secure the mat by inserting the retaining clips through the grommet holes.

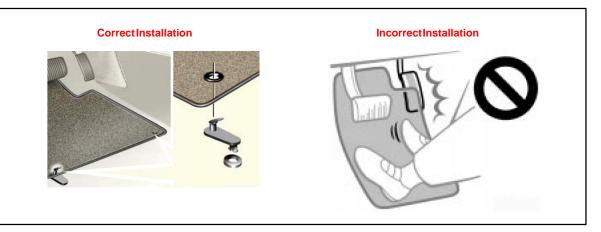

Warranty
Information

ranty	OP CODE	DESCRIPTION	TIME	OFP	T1	T2
ation	N/A	Not Applicable to Warranty	-	-	I	-

